


Flashing compatibility guide


VELUX®

EDL/EBL/EKL

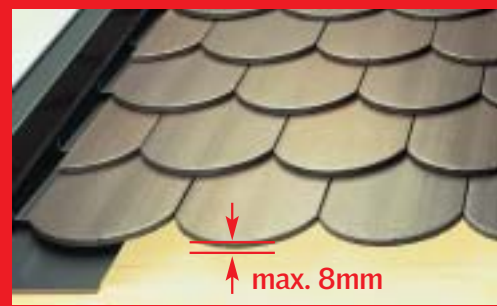


- For roof pitches from 15-90°.
- Flashing for installing roof window into slate up to 8mm thick.
- Not for interlocking slate.

EDN

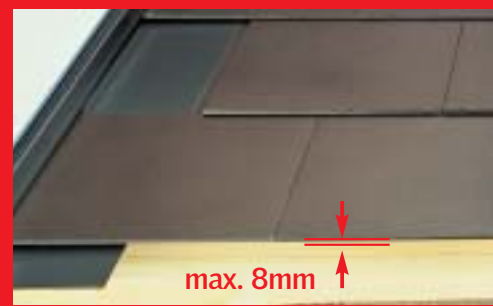


- For roof pitches from 35-90°.
- For recessed installation of one roof window into slate up to 8mm thick.
- Not for interlocking slate.
- Coupled version also available.

EDZ

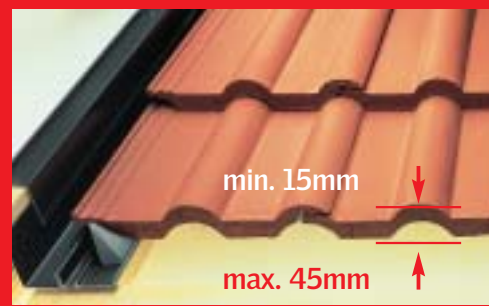


- For roof pitches from 20-90°.
- Flashings for installing one roof window in flat or profiled roofing material.
- Minimum profile of 15mm and maximum profile of 45mm.

EDW/EBW/EKW

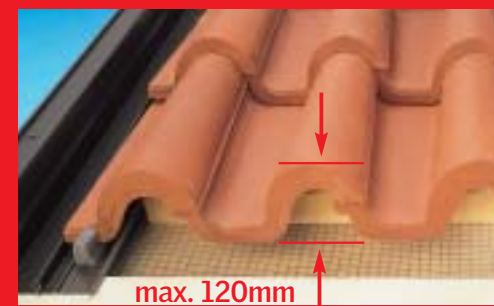

- For roof pitches from 15-90°.
- Flashings for installing roof window in flat or profiled roofing material up to 120mm in profile.
- Also for interlocking slate, thatch and profile sheeting.

EDP/EBP*/EKP*

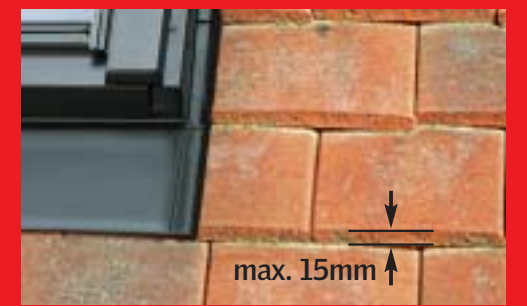

- For roof pitches from 25-90°.
- For installing roof window in plain tiles (max length 340mm).
- Maximum thickness of 15 mm.



Anglia



Bold Roll



Monarch



Mendip



Ludlow Plus



Edgemere



Malvern



Marquess



Melbourn



Ludlow Major



Double Roman



Flashing	Installation	Roof pitch
EDW	Single	15° - 90°
EBW	Twin	15° - 90°
EKW	Combi	15° - 90°

Flashing	Installation	Roof pitch
EDZ	Single	20° - 90°
EBW	Twin	15° - 90°
EKW	Combi	15° - 90°

Plain



Heritage



Thaxden



Marlden



Duo Modern




Ashmore



Clansman




Acme



Acme Double Camber



Hawkins




Modern



Wessex



Ashdowne



Flashing	Installation	Roof pitch
EDP	Single	25° - 90°
EBP*	Twin	25° - 90°
EKP*	Combi	25° - 90°

Flashing	Installation	Roof pitch
EDW	Single	15° - 90°
EDZ	Single	20° - 90°
EBW	Twin	15° - 90°
EKW	Combi	15° - 90°

*EBP and EKP flashings are available from May 2008.

Refer to the roof covering manufacturer for the minimum roof pitch at which each slate and tile can be laid.

Redland

Grovebury



Double Roman



Cathedral Clay Pantile



DuoPlain



Saxon



Richmond



Landmark Slate



Flashing	Installation	Roof pitch
EDZ	Single	20° - 90°
EBW	Twin	15° - 90°
EKW	Combi	15° - 90°

Renown



49 Tile



Cambrian Slate



Regent



Rosemary Clay



Plain



Stonewold II




Mini Stonewold



Norfolk Pantile



Landmark Double Pantile



Heathland



Downland



Flashing	Installation	Roof pitch
EDW	Single	15° - 90°
EDZ	Single	20° - 90°
EBW	Twin	15° - 90°
EKW	Combi	15° - 90°

Flashing	Installation	Roof pitch
EDW	Single	15° - 90°
EBW	Twin	15° - 90°
EKW	Combi	15° - 90°

Flashing	Installation	Roof pitch
EDP	Single	25° - 90°
EBP*	Twin	25° - 90°
EKP*	Combi	25° - 90°

*EBP and EKP flashings are available from May 2008.

Find the right VELUX flashing for all roof coverings on the Installers Club at www.velux.co.uk